


PERFORMANCE SPECIFICATIONS

TEMP. RANGE: -20° F to 180° F
 LOAD RATING: 50 PSI

MATERIALS OF CONSTRUCTION

ELASTOMER: ASTM D2000 Neoprene
 CORK: MC-2 11# cork permanently bonded between
 2 layers of waffle-tread design elastomer

DIMENSIONAL DATA

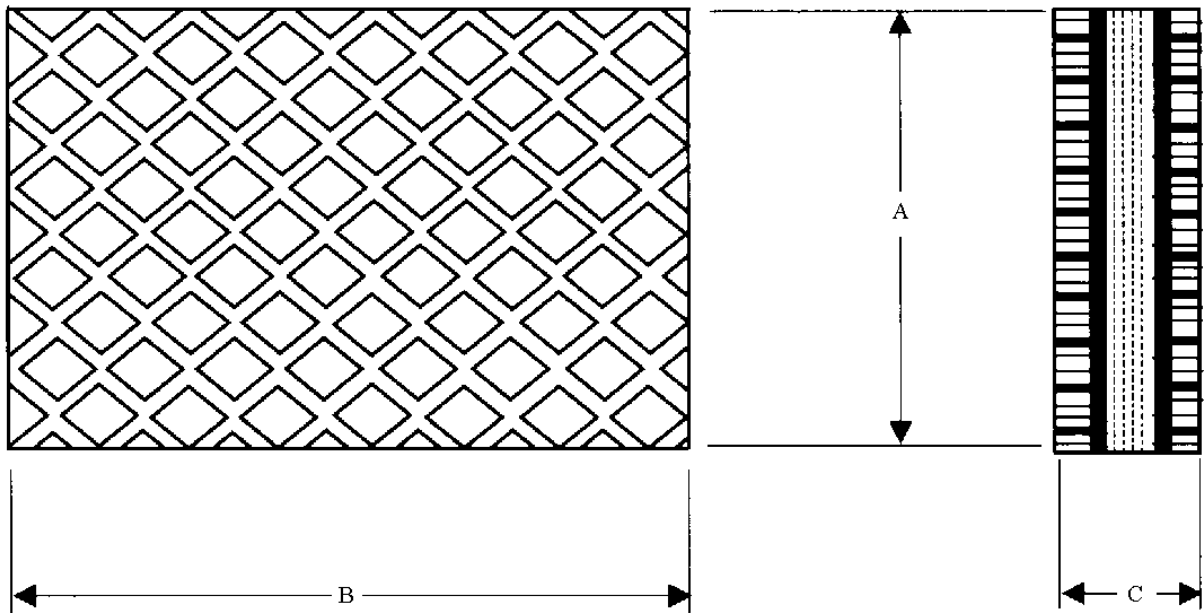

PART NO.	A	B	C	Area (in ²)	Max. Load/Pad (PSI)
HF00896814	3.0	3.0	1.0	9.00	450
HF20007590	2.0	8.0	1.0	16.00	800
HF10771055	6.0	8.0	1.0	48.00	2400
VP1003583	1.5	1.5	1.0	2.25	113
VP1003005	4.0	4.0	1.0	16.00	800
VP1003074	6.0	6.0	1.0	36.00	1800
VP1003778	8.0	8.0	1.0	64.00	3200

PRODUCT NOTES

- Information is approximate, subject to change without notice, and not for construction use unless certified
- All dimensions are in inches

Gardner Denver Engineered Products Division

100 Gardner Park, Peachtree City, GA 30269
 Phone: 800-982-3009 / 770-632-5000
 Fax: 770-486-5628
 E-mail: blowersmktg@gardnerdenver.com
 Web: www.gardnerdenver.com



"Over 145 Years of Leadership"